

TY-隔爆/增安.非铠装

TY系列隔爆非铠装电缆引入装置(填料函、电缆戈兰)


cable gland



材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)	
特点 Features	适用于非铠装电缆 Suitable for non armored cable	
防爆标志 Ex mark	Ex d IIC Gb/ DIP A20	防护等级 Degree of protection
工作温度 COT	-60°C ~100°C	



1、密封圈材质: 硅橡胶 1, sealing ring material: silicone rubber

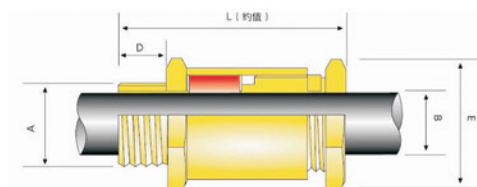

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	电缆 B Cable B	最大外径E Max Across Corners E	L
	公制ISO Metric ISO	NPT/G				
TY-01	M16 × 1.5	3 / 8	13	3-10	31	59
TY-02	M20 × 1.5	1 / 2	14	5-14	34	61
TY-03	M25 × 1.5	3 / 4	19	6-16	37	61
TY-04	M32 × 1.5	1	19	10-22	47	68
TY-05	M40 × 1.5	1-1/4	21	15-28	57	72
TY-06	M50 × 1.5	1-1/2	21	23-36	67	72
TY-07	M63 × 1.5	2	21	35-48	80	72
TY-08	M75 × 1.5	2-1/2	25	47-53	99	85
TY-09	M80 × 1.5	3	30	48-62	108	90
TY-10	M90 × 2	3-1/2	30	55-74	121	92
TY-11	M100 × 2	4	30	60-85	136	97

1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
2、NPT螺纹长度为有效螺纹长度;

1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
2, NPT thread length for effective thread length;

TZ-隔爆/增安

TZ系列隔爆非铠装电缆引入装置(填料函、电缆戈兰)


cable gland



材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)	
特点 Features	适用于非铠装电缆 Suitable for non armored cable	
防爆标志 Ex mark	Ex d IIC Gb/ DIP A20	防护等级 Degree of protection
工作温度 COT	-60°C ~100°C	



1、密封圈材质: 硅橡胶 1, sealing ring material: silicone rubber

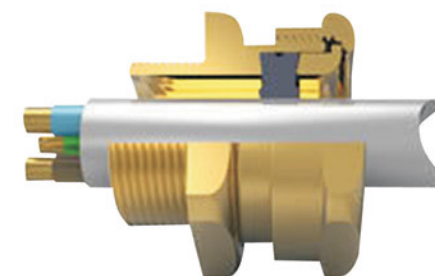

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	电缆 B Cable B	最大外径E Max Across Corners E	L
	公制ISO Metric ISO	NPT/G				
TZ-01	M16 × 1.5/M20 × 1.5	3 / 8	15	3-8	22	36.8
TZ-02	M20 × 1.5	1 / 2	15	7.5-12	27	37.8
TZ-03	M20 × 1.5	1 / 2 / 3 / 4	15	11-14	34	38.8
TZ-04	M25 × 1.5	1 3 / 4	15	13-20	41	41.5
TZ-05	M32 × 1.5	1 1 / 4 / 1	15	19-26.5	53	42.5
TZ-06	M40 × 1.5	1 1 / 2 / 1 / 4	15	25-32.5	63	42.5
TZ-07	M50 × 1.5	2 1 / 2	15	31.5-44.4	75	53.5
TZ-08	M63 × 1.5	2 1 / 2 / 2	15	42.5-56.3	92	53.5
TZ-09	M75 × 1.5	3 1 / 2	15	54.5-68.2	109	53.5
TZ-10	M80 × 1.5	3 1 / 2	20	67-73	123	56
TZ-11	M90 × 2	3 1 / 2	20	67-77.6	132	56
TZ-12	M100 × 2	4 1 / 2	20	75-92	146	56

1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
2、NPT螺纹长度为有效螺纹长度;

1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
2, NPT thread length for effective thread length;